



Type	: Rechargeable Lithium Ferro Phosphate Prismatic Batteries
Nominal Dimension	: T = 30.0mm +0.3/-0 H = 176.0mm +2/-0 W = 95.0mm +0.3/-0
Nominal Voltage	: 3.2V
Capacity	: Min. 30Ah at 30A discharge to 2.0V at 20°C
Charging Method	: 15A (0.5C) to 3.65V for 2.5hrs at 20°C
Charging Termination Control	: Taper Current 0.05C (1.5A) at 3.65V
Max. Discharge Current	: 300A (10C)
Service Life	: >1000 cycles
Weight	: ~ 1.1kg
Internal Resistance	: < 2mΩ
Ambient Temperature Range	: Charge : 0 to 60°C (conditionally) Discharge : -30 to 70°C (conditionally) Storage : -20 to 45°C


Model No.: GP30EVLF

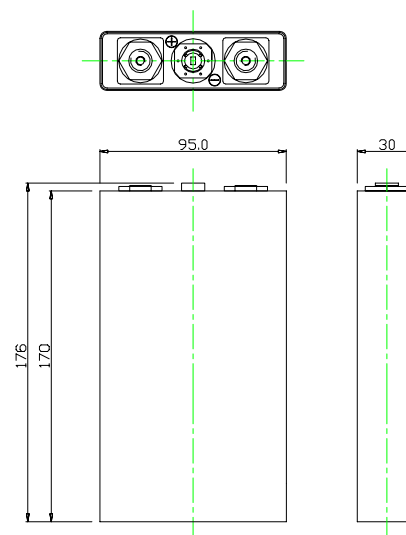


Charging Characteristics

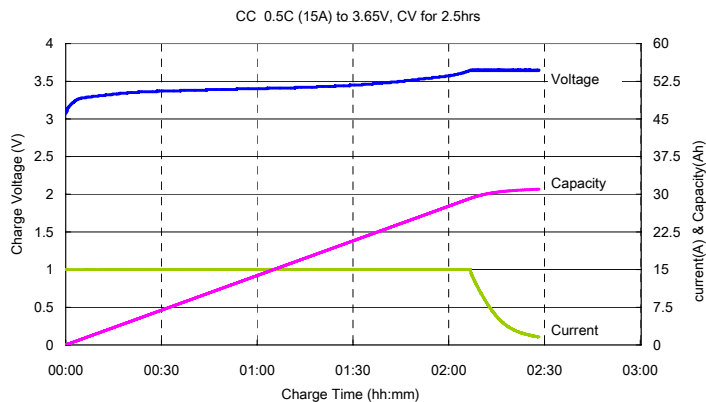

Low C-rate Discharge

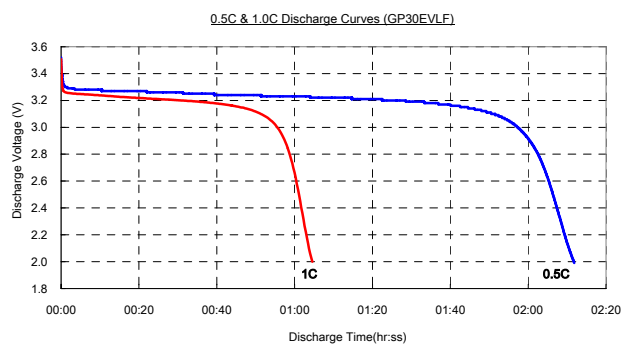

High C-rate Discharge

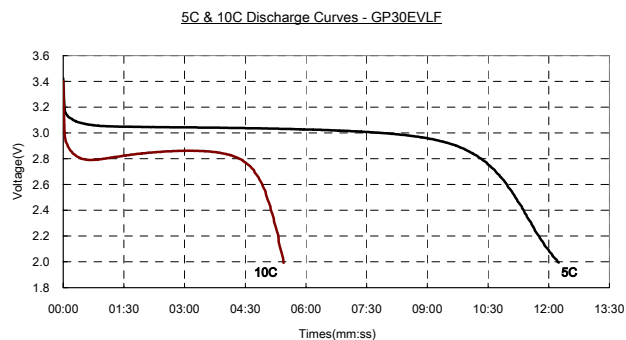

The information (subject to change without prior notice) contained in this document is for reference only and should not be used as a basis for product guarantee or warranty. For applications other than those described here, please consult your nearest GP Sales and Marketing Office or Distributors.