




PRODUCT DATA SHEET

EVB TECHNOLOGY (HK) LTD.




scan QR code for product manual in PDF


or visit www.evbtch.com/resources



10GP30EVH

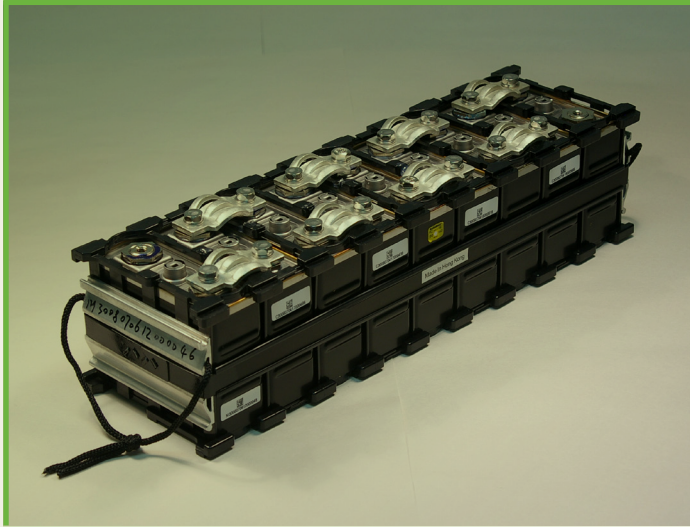


DIAGRAM

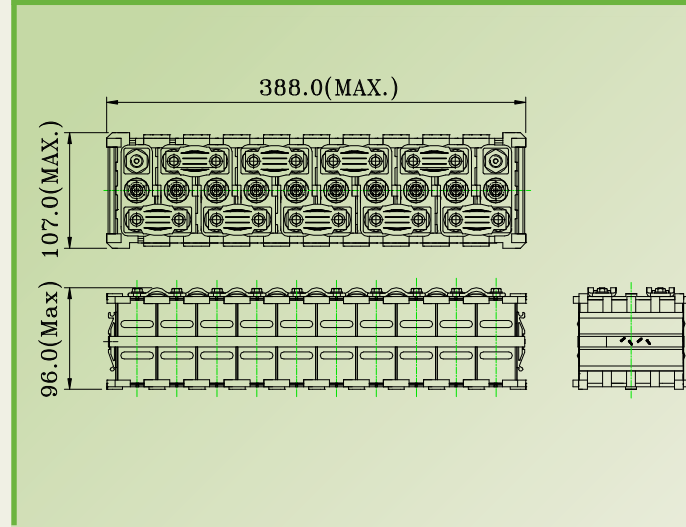


10GP30EVH — DIAGRAM REF # EED016 071 REV.1


CHARGING CHARACTERISTICS AT 20°C

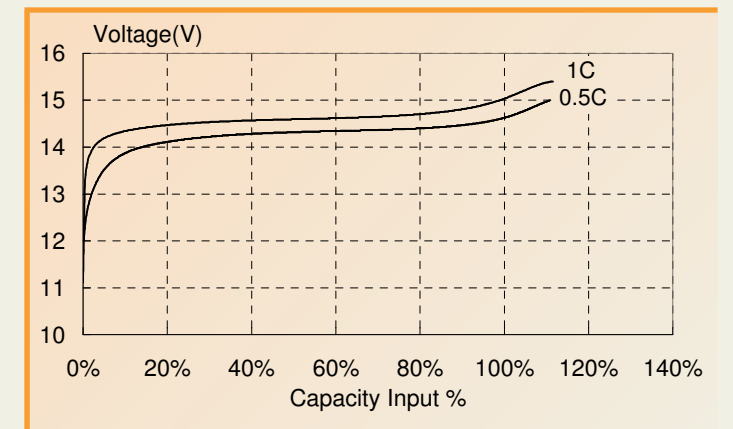

LOW RATE DISCHARGE AT 20°C

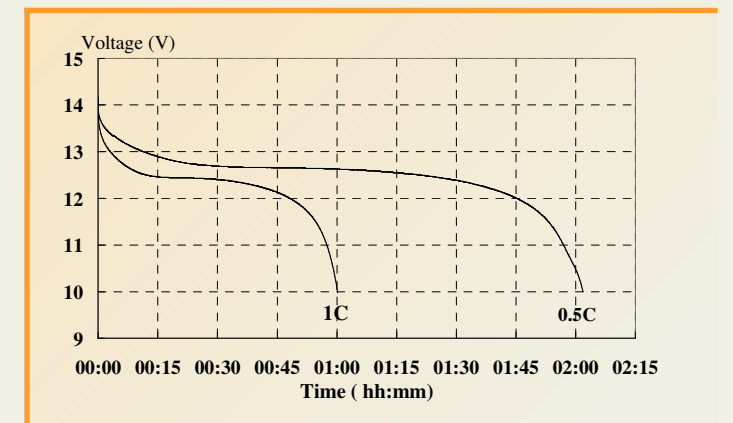

HIGH RATE DISCHARGE AT 20°C

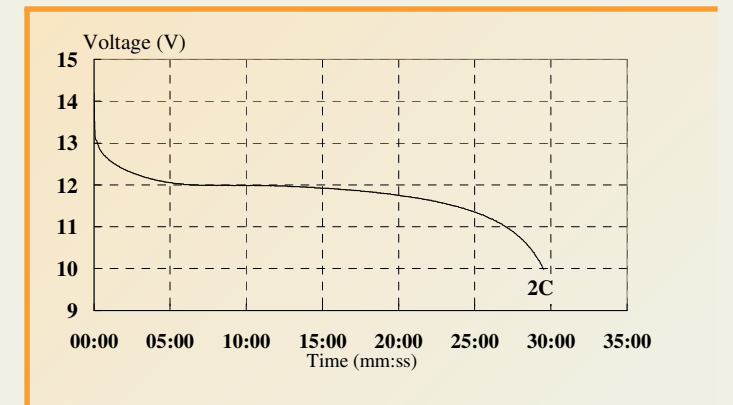

TECHNICAL SPECIFICATIONS

Type	Rechargeable Nickel Metal Hydride Prismatic Batteries
Nominal dimension	H = 96.0mm L = 388.0mm W = 107.0mm
Nominal voltage	12 V
Capacity	30Ah at 15A (0.5C) discharge to 10V / module at 20°C
Specific energy	42Wh/kg at 0.5C discharge
Specific power	121W/kg with 80% SOC at 3C 30 sec.
Energy density	90Wh/L at 0.5C discharge
Power density	261W/L with 80% SOC at 3C 30sec.
Charging current	6A (0.2C) to 15A (0.5C) recommended
Charging termination	-ΔV : 0mV/cell to 10mV/cell TCO: 45°C Timer: 100% nominal capacity input

note: The above 3 charge termination controls must be used concurrently

Max. charging temp.	Cell temperature must not exceed 45°C
Max. charging current	30A (1C) continuous note: Consult EVB for high current fast charge.
Max. discharge current	60A (2C) continuous 90A (3C) pulse for 5s
Service life	>1500 cycles (80%DOD at 1C)
Weight	~8.6kg
Internal resistance	<12mΩ
Ambient temperature Range	Charge: 0 to 45°C (conditionally) Discharge: -20°C to 50°C (conditionally) Storage: -20°C to 35°C
ISO document #	ERS0137 Rev. 02/0912
Safety certificate	UN 38.3, UL

The information (subject to change without prior notice) contained in this document is for reference only and should not be used as a basis for product guarantee or warranty. For applications other than those described here, please consult your nearest EVB Technology Sales and Marketing Office or Authorized Distributors.

Manufacturer reserves the right to alter or amend the design, model and specification without prior notice. Copyright © EVB Technology (HK) Ltd. — All rights reserved